

PS 1061 Test Probe, Ø 2 mm, 10 A



Description

- Test Probe
- diameter 2.0 mm

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)


Technical Data

| | |
|---------------------------------|-----------------|
| Diameter | 2 mm |
| Rated current | 10 A |
| Allowable Operation Temperature | -25 °C to 70 °C |

| | |
|------------------------------|--|
| Resistance to Soldering Heat | 260 °C / 5 sec acc. to IEC 60068-2-20 , Test Tb, method 1A |
| Weight | 0.5 g |
| Material: Housing | Thermoplastic (PC), UL 94V-2 |
| Surface of contacts | gold plated , Thickness 1.0 µm |

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

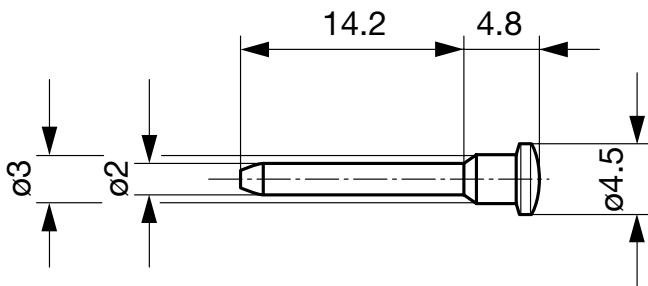

All Variants

| Product group | Color | Order Number |
|---------------|-------|--------------|
| Test Probe | red | 0040.1062 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[Test Jacks & Probes Overview complete](#)

| | |
|--|-------------------------|
| PB 1011 Test Jack, PCB Mounting, Ø 2 mm, 10 A | PB 1011 |
| PB 1021 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A | PB 1021 |
| PB 1101 Test Jack, PCB Mounting, Ø 2 mm, 10 A | PB 1101 |
| PB 1111 Test Jack, PCB Mounting, Ø 2 mm, 10 A | PB 1111 |
| PB 1151 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A | PB 1151 |
| Test Jacks & Probes further types to PS 1061 | ... |