

NOTES:


1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 500 MHz
- 1.2 MAXIMUM INPUT POWER:
 +25°C 2 WATTS
 +125°C 0.5 WATTS
- 1.3 OPERATING TEMPERATURE RANGE:
 -55°C to +125°C
- 1.4 MAXIMUM VSWR: 1.25:1
- 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
 (REF.: INK-02639-27-55)

3.0 DIMENSIONS IN PARENTHESIS ARE
 IN MILLIMETERS.

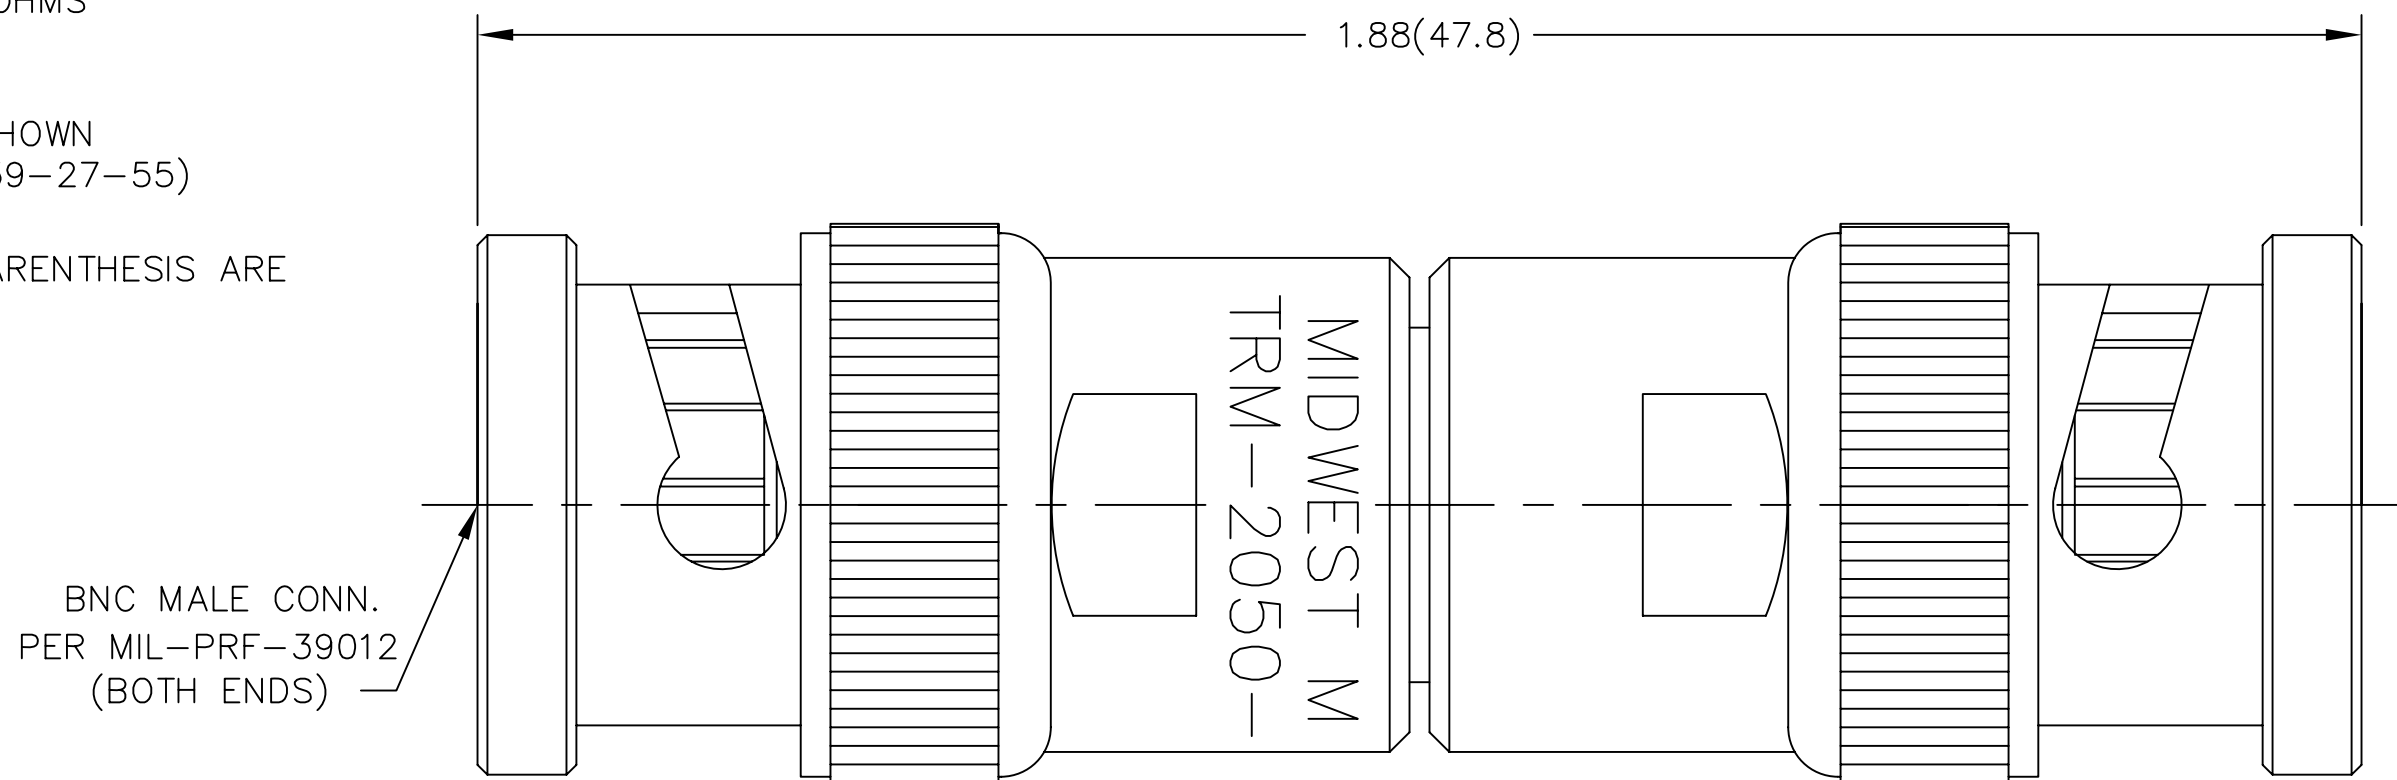

MODEL NUMBER	TRM-2050-MM-BNC-10
REV.	A1

REV.	DESCRIPTION	DATE
-	RELEASED	2/16/95
A	ECN 14586	7/6/95
A1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO.	34078 MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
	DRAWN/DATE A.BEATTY 2/14/95	ENG./DATE A.OSGA 2/16/95	DRAWING NUMBER TRM-2050-MM-BNC-10	
	CHECKED/DATE P.GOODMAN 2/16/95	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1